



KERN HUM

Crane scale

Ideal for the industry, up to 3,000 kg

Order Hotline:
Go to back page of catalogue

Standard



Adjusting program (CAL):
For quick setting of the balance's accuracy. External adjusting weight required.



Rechargeable battery pack:
rechargeable set.



Mains adapter: 230 V/50Hz in standard version for Germany. On request GB, AUS or USA version.



Tare: put back displayed value to „0“ during weighing process, e.g. to add or remove weighing material from a container.

STANDARD



Metal housing

Luminescent LED display
digit height 25 mm

Rechargeable battery pack internal
standard, operating time approx. 80 h, charging time approx. 8 h with internal mains adapter Selectable: AUTO-OFF function after 4 min without a change of load to preserve the battery

Radio remote control
standard. Range approx. 25 m. All functions (excl. ON/OFF) can be selected.
WxDxH 65x40x15 mm



Ready for use
battery (23A, 12V) included



Hook with safety catch, revolving

Price reduction




Tare
Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed

Data Hold function
the weight display can be "frozen" using the HOLD key until another key is pressed



Adjusting program CAL
External test weights at an additional price

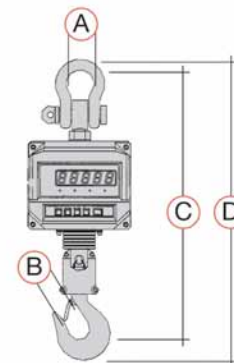

Model	Weighing range Max kg	Read-out d g	Net weight kg	Housing size WxDxH mm	Dimensions				OPTION Certifi- cate KERN
					A	B	C	D	
KERN					mm	mm	mm	mm	
HUM 1000K500	1000	500	17	210x228x180	56	42	550	620	963-130
HUM 3000K1000	3000	1000	18	210x228x180	73	45	580	650	-

Precision 0.2% of Max.

Delivery
1 day

3
Years warranty

OPTION
DKD
Certificate
+4 days